




# YESIR

end-to-end HVAC&R Solution Partner



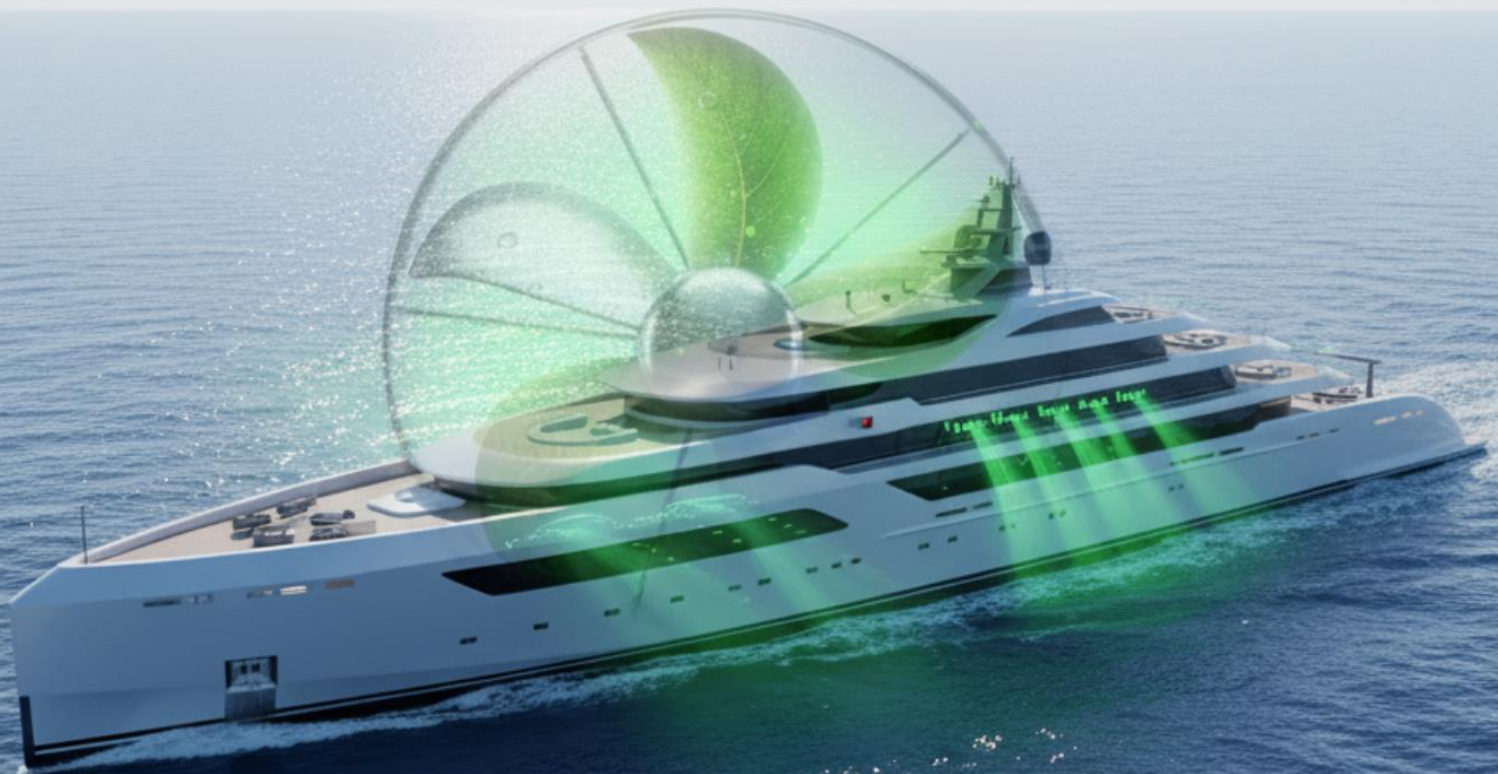

# YESIR

end-to-end HVAC&R Solution Partner


## DUCT FANS





# YESIR

end-to-end HVAC&R Solution Partner

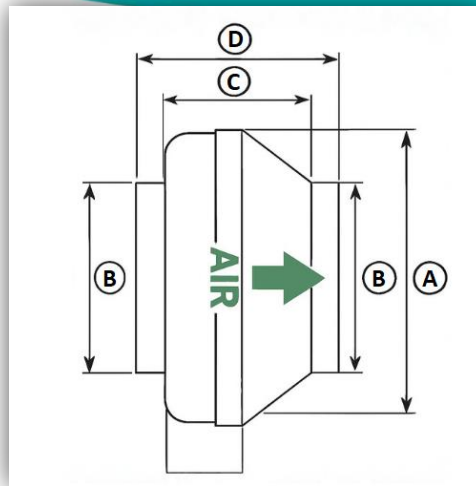

NO	TYPE	DIMENSION			
		A	B	C	D
1	DF-100M	218 mm	99 mm	166 mm	218 mm
2	DF-100XL	246 mm	99 mm	161 mm	213 mm
3	DF-125M	218 mm	124 mm	142 mm	196 mm
4	DF-125XL	246 mm	124 mm	151 mm	203 mm
5	DF-160M	286 mm	159 mm	147 mm	198 mm
6	DF-160XL	336 mm	159 mm	166 mm	221 mm
7	DF-200M	336 mm	199 mm	148 mm	205 mm
8	DF-200L	336 mm	199 mm	174 mm	231 mm
9	DF-250M	336 mm	249 mm	120 mm	177 mm
10	DF-250L	336 mm	249 mm	145 mm	202 mm
11	DF-315M	408 mm	314 mm	161 mm	220 mm
12	DF-315L	408 mm	314 mm	161 mm	225 mm

The airflow rate and required external pressures are calculated according to vessel general arrangement. Suitable duct fans are selected according to ventilation design. Duct fans are used for air supply or exhaust indoor environment in the vessels. It can be used also wet areas such as WC and showers. The casing of the fan is galvanized sheet. Protection class is IP44. Please contact us for more details. [rfg@yesir.com.tr](mailto:rfg@yesir.com.tr)