



# YESIR

end-to-end HVAC&R Solution Partner





# YESIR

end-to-end HVAC&R Solution Partner

## FAN COIL





# YESIR

end-to-end HVAC&R Solution Partner

## INDEX


0. INTRODUCTION .....	1
1. AFC COMPACT TYPE FAN COIL UNIT .....	2
2. AFS VERTICAL TYPE FAN COIL UNIT .....	3
3. AFSH HORIZONTAL TYPE FAN COIL UNIT.....	4



# YESIR

end-to-end HVAC&R Solution Partner

## 0. INTRODUCTION

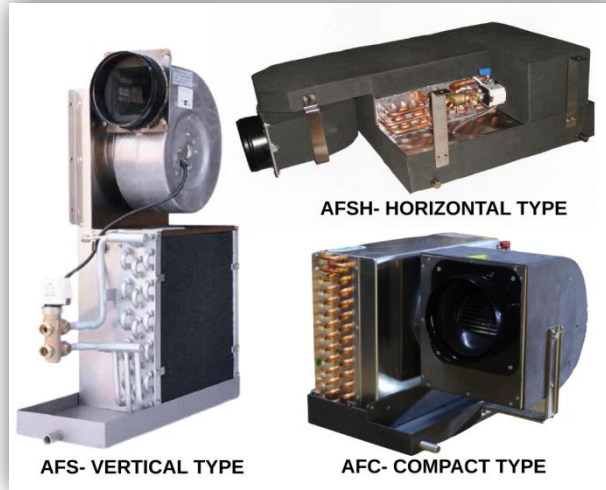

Yesir Klima Teknik designs and delivers a wide range of marine-type fan coil units tailored to customer-specific requirements and fully compliant with the rules of leading classification societies.

From concept to final delivery, compliance with maritime standards is our top priority. Every stage of production is carefully monitored and controlled by Yesir Klima Teknik. Through comprehensive know-how transfer and on-site inspections, we ensure that all equipment meets marine standards, class regulations, and client specifications without compromise.

Manufacturing is performed by our trusted strategic partner, Argosair, in accordance with internationally recognized standards and strict quality assurance processes. This collaboration guarantees high performance, durability, and long-term operational reliability, even under demanding marine conditions.

A variety of custom-configured fan coil units are available to meet diverse project needs. Compact, vertical or horizontal type fan coil units options include direct expansion cooling coils, chilled water cooling coils, hot water heating coils, electric heaters, all integrated to deliver optimal comfort and efficiency at sea. Please contact us for more details. [rfq@yesir.com.tr](mailto:rfq@yesir.com.tr)



# YESIR

end-to-end HVAC&R Solution Partner

## 1. AFC COMPACT TYPE FAN COIL UNIT

NO	MODEL	COOLING CAPACITY	AIR FLOW RATE	ELECTRICAL HEATER	NET WEIGHT	DUST FILTER	DIMENSION			
							LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	DUCT CONNECTION (mm)
1	AFC05	1460 W	275 m <sup>3</sup> /h	Optional	10,0 kg	G2 Standart	330	250	270	100
2	AFC08	2340 W	325 m <sup>3</sup> /h	Optional	10,0 kg	G2 Standart	330	270	270	100
3	AFC10	2930 W	430 m <sup>3</sup> /h	Optional	12,5 kg	G2 Standart	340	270	320	125
4	AFC12	3510 W	550 m <sup>3</sup> /h	Optional	12,5 kg	G2 Standart	340	270	320	125
5	AFC16	4690 W	580 m <sup>3</sup> /h	Optional	16,5 kg	G2 Standart	420	288	320	125
6	AFC18	5270 W	675 m <sup>3</sup> /h	Optional	16,5 kg	G2 Standart	420	288	320	150
7	AFC21	6150 W	775 m <sup>3</sup> /h	Optional	19,0 kg	G2 Standart	455	295	345	150
8	AFC24	7030 W	875 m <sup>3</sup> /h	Optional	19,0 kg	G2 Standart	455	320	345	180

Thermostat and water regulation valve are included in standard delivery.



# YESIR

end-to-end HVAC&R Solution Partner

## 2. AFS VERTICAL TYPE FAN COIL UNIT

NO	MODEL	COOLING CAPACITY	AIR FLOW RATE	ELECTRICAL HEATER	NET WEIGHT	DUST FILTER	DIMENSION			
							LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	DUCT CONNECTION (mm)
1	AFS05	1460 W	275 m <sup>3</sup> /h	Optional	10,8 kg	G2 Standart	418	150	545	100
2	AFS08	2340 W	325 m <sup>3</sup> /h	Optional	11,2 kg	G2 Standart	418	170	545	100
3	AFS10	2930 W	430 m <sup>3</sup> /h	Optional	13,5 kg	G2 Standart	448	170	595	125
4	AFS12	3510 W	550 m <sup>3</sup> /h	Optional	13,5 kg	G2 Standart	448	170	595	125
5	AFS16	4690 W	580 m <sup>3</sup> /h	Optional	17,5 kg	G2 Standart	520	175	605	125
6	AFS18	5270 W	675 m <sup>3</sup> /h	Optional	17,5 kg	G2 Standart	520	175	605	150
7	AFS21	6150 W	775 m <sup>3</sup> /h	Optional	20,0 kg	G2 Standart	555	175	647	150
8	AFS24	7030 W	875 m <sup>3</sup> /h	Optional	20,0 kg	G2 Standart	555	240	630	180

Thermostat and water regulation valve are included in standard delivery.



# YESIR

end-to-end HVAC&R Solution Partner

### 3. AFSH HORIZONTAL TYPE FAN COIL UNIT

NO	MODEL	COOLING CAPACITY	AIR FLOW RATE	ELECTRICAL HEATER	NET WEIGHT	DUST FILTER	DIMENSION			
							LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	DUCT CONNECTION (mm)
1	AFSH05	1460 W	275 m <sup>3</sup> /h	Optional	11,8 kg	G2 Standart	550	410	200	100
2	AFSH08	2340 W	325 m <sup>3</sup> /h	Optional	12,2 kg	G2 Standart	550	430	220	100
3	AFSH10	2930 W	430 m <sup>3</sup> /h	Optional	14,5 kg	G2 Standart	448	460	220	125
4	AFSH12	3510 W	550 m <sup>3</sup> /h	Optional	14,5 kg	G2 Standart	448	460	220	125
5	AFSH16	4690 W	580 m <sup>3</sup> /h	Optional	18,5 kg	G2 Standart	520	525	230	125
6	AFSH18	5270 W	675 m <sup>3</sup> /h	Optional	18,5 kg	G2 Standart	520	525	230	150
7	AFSH21	6150 W	775 m <sup>3</sup> /h	Optional	21,0 kg	G2 Standart	555	570	230	150
8	AFSH24	7030 W	875 m <sup>3</sup> /h	Optional	21,0 kg	G2 Standart	555	570	230	180

Thermostat and water regulation valve are included in standard delivery.